

# Currenza C<sup>2</sup>

Coin changer and recycler




The first and only 6-tubes coin changer  
with Payout Redundancy System

## Reduce your machine downtime and increase revenues

Currenza C<sup>2</sup> with PRP (Payout Redundancy Protection) system is specifically designed for the operator: it minimizes machine down time and assures high safety in every applications, making the vending machine more profitable and reliable. Currenza C<sup>2</sup> is also available with telemetry system to have the full control of the vending machine. It can send alarm text messages in real time and manage the digital remote data transmission.

### Features

- Acceptance and payout of all circulation coins (also 0,01 €)
- 6 self-filling tubes reducing refilling needs and providing optimum set-up of payout configuration and float level and easy access in case of maintenance
- Modular cassette structure for great freedom in tube configuration
- Payout combination optimization to meet each machine's planogram and site users payment behavior
- High payout speed of up to 6 coins per second and acceptance speed of up to 3 coins/second
- MFT technology providing a more secure coin validation, sensor system to measure up to 40 different parameters
- Easy and fast programming with user-friendly intuitive menu
- Henri Service module with updating slot and USB port for programming, configuration change and firmware updating
- Audit Stick USB for collecting audit data easily, securely and quickly via IrDa or printer cable and managing them
- Telemetry system as option: possibility to send alarm text messages in real time, control machine events, manage the digital remote data transmission, change the prices and set the machine under-stock
- Easy access to validation and sorting area for maintenance

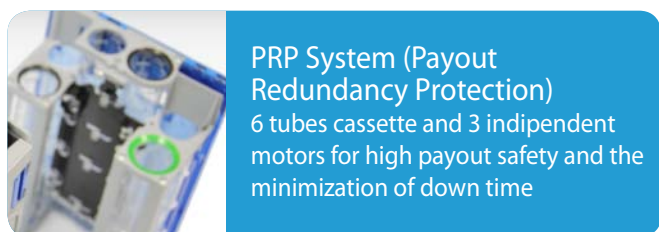

**PRP System (Payout Redundancy Protection)**  
6 tubes cassette and 3 independent motors for high payout safety and the minimization of down time

### Tools

Audit manager  
Free of charge management software with EVA-DTS / DEX-UCS file data retrieval including "Audit knob" function to freeze data until data retrieval is remotely completed

### Optional accessories

- Henri Service module
- Audit Stick USB
- Telemetry System
- External box to connect Currenza C<sup>2</sup> to small automatic and semi-automatic vending machines

### Technical specifications

Dimensions (LxHxW)	137.75 x 377.10 x 80.00 mm
Power supply	BDV: 18V ÷ 43V DC MDB: 18V ÷ 43V DC Battery MDB: 11V ÷ 43V Executive version: 24V AC
Power consumption	- Stand-by mode: 2.5V max - Coin payout: 16.0V max – 48V max with 3 motors - Coin acceptance: 16.0V max
Operating temperature	-25°C ÷ +80°C

### Tubes combinations

Diameter (mm)	Tubes					
	A	B	C	D	E	F
29.0 – 32.5	•					
26.5 – 29.0	•		•			•
24.5 – 26.5	•		•			•
23.0 – 24.5	•	•	•	•	•	•
21.5 – 23.5	•	•	•	•	•	•
20.0 – 21.5		•	•	•	•	•
18.5 – 20.00		•	•	•	•	
17.0 – 18.5		•		•	•	
16.0 – 17.0		•		•	•	
15.0 – 16.0		•		•		

### Versions

- Blue (EXE, MDB) with display and keys
- White (MDB) without keys or display



### Tubes capacity

Coins	Tube capacity
2 €	72
1 € - 0.50 €	69 - 67
0.20 €	75
0.10 € - 0.02 €	83 - 97
0.05 €	95
0.01 €	97